

In-Wall Tank and Bowl Carrier System With Dual Flush Technology

Geberit Model No. 111.728.00.1

Flush Volume: 1.6 / 0.8 GPF - 6.0 / 3.0 LPF

D43300-002 © 07-2010



cUPC®

965.394.00.0 (00)

Product Data

Product Specifications

- For installing 2-hole stud mounted wall-hung washdown water closet fixtures with rear water inlet and waste outlet
- For 6 GPF (6 LPF) single flush or 1.6/0.8 GPF (6/3 LPF) dual flush fixtures
- For installation within or in front of drywall panels
- For installation in front of solid walls.
- Fits within minimum 3 1/2" (90) framing wall or plumbing chase
- Adjustable for fixture seat heights from 15" to 19" (381 to 483)
- 1/2" water supply
- For flush actuator plates Sigma, Bolero, Samba, Mambo, Tango, Rumba

Features

- HET water consumption – Dual-flush 1.6/0.8 GPF (6/3 LPF) gives effective flush volume of 1.1 GPF (4 LPF)
- Anti-siphon fill valve
- Impact resistant high density polyethylene (HDPE) tank, insulated to prevent condensation
- 16-gauge, powder-coated, structural steel tubing rated to 880 lbs. (400 kg) without damage to finished wall or carrier unit
- Includes installation and rough-in materials


Warranty

Limited lifetime warranty on tank and carrier
 10-year warranty on fill valve and flush valve
 One-year warranty on actuator flush panels.

Standards


In compliance with:

- ASME: A112.6.2, A112.19.5, A112.19.14
 - ANSI Z124.4
 - CSA B125.3
 - ANSI/ASSE 1002
 - IAPMO PS-50
 - UNAR / UNAR-HET
 - Meets or exceeds the WaterSense® HET and ASME A112.19.2 specifications when installed in combination with appropriate matching fixture.
- For a list of certified combinations, refer to www.geberit.us

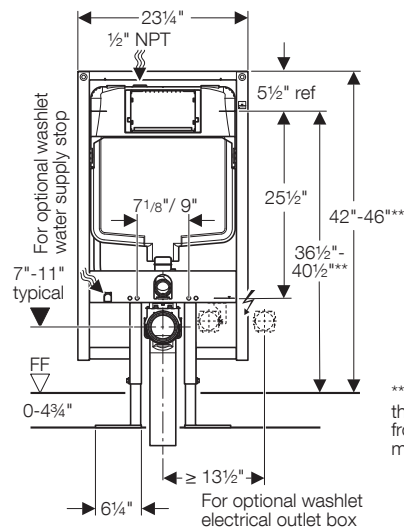


** assumes a typical seat thickness of 1" and a distance from fixture rim to mounting rod centers of 3"

For 3 1/2" max. wall thickness
Vertical drainage only

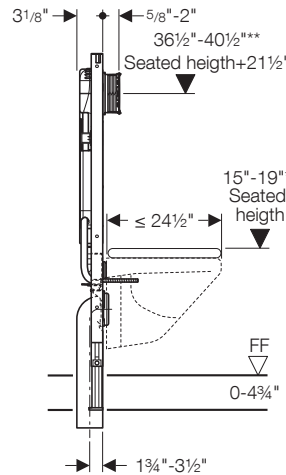

For 5 1/2" min. wall thickness
For RH, LH and vertical drainage



Material Determination

Recommended material for wall surface construction:

- Gypsum / green board
- Cement board
- Tile backer board
- Ceramic tile surface



Minimum wall material thickness 3/4" (20 mm).

Installation

Installation Requirements

To install carrier, a minimum 3½" wall is required. A 2 x 6" wood frame or metal frame construction is recommended. Studs must be placed 23¼" apart (clearance) where carrier will be positioned inside the wall.

Prepare


These values are needed to set proper frame height at roughing in:

- FF: Finished Floor Height
- FSH: Finished Seated Height
- ST: Seat thickness, based on seat model
- RT: Distance from fixture rim to mounting centers, based on ceramic model
- H: Frame Height, subject to conditions below:

$$H = FSH - RT - ST + 31" (790)$$

These values are not needed at roughing in, but may be useful as alternate references:

- FV: Flush Valve Height (see below)
- R: Rod Height, based on ceramic model and FSH (see below)
- D: Drain outlet, based on ceramic model and FSH (see below)

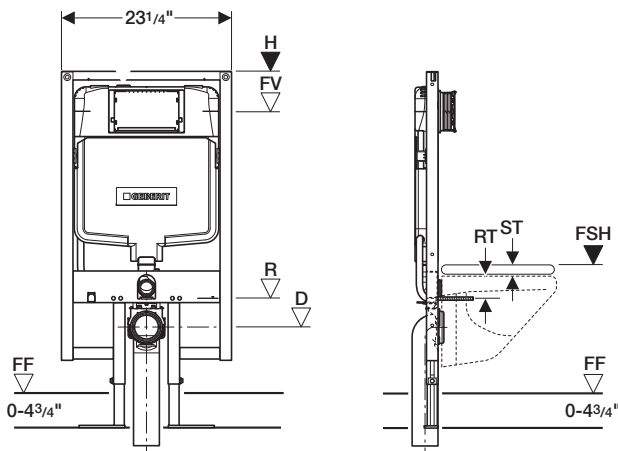

For convenience, values for a "typical" situation are included in the following chart:

FOR REFERENCE

Finished Seat Height (FSH)	Frame Height (H)	Flush Valve Height (FV)	Rod Height (R)	Drain Outlet Height (D)
15	42 1/8	36 5/8	11	7 1/8
16	43 1/8	37 5/8	12	8 1/8
17	44 1/8	38 5/8	13	9 1/8
18	45 1/8	39 5/8	14	10 1/8
19	46 1/8	40 5/8	15	11 1/8

** assumes a typical seat thickness of 1" and a distance from fixture rim to mounting rod centers of 3". Always refer to the manufacturer specification sheet for the latest information!

These dimensions are used for later, after the frame is installed:

RC: Rod Center-to-Center Distance, based on ceramic model

Other calculations (for reference only)

$$FV = FSH - RT - ST + 25\frac{1}{2}" (650)$$

$$R = FSH - RT - ST$$

$$D = FSH - RT - ST - 4" (100)$$

or



$$FV = R + 25\frac{1}{2}" (650)$$

$$H = R + 31" (790)$$


$$D = R - 4" (100)$$



All dimensions Above Finished Floor (AFF)

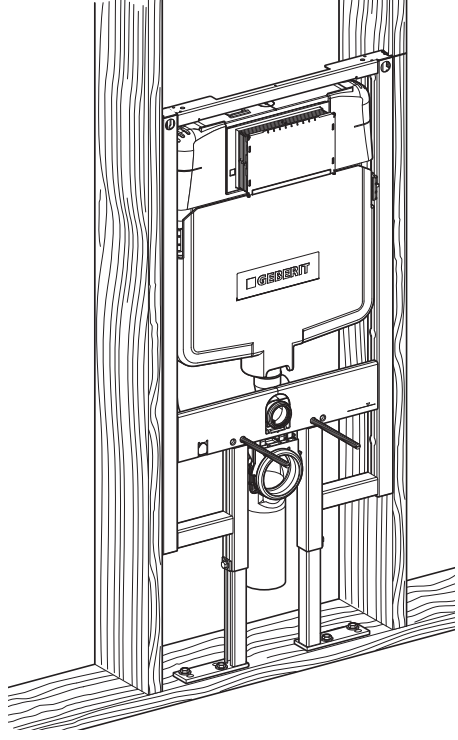min. 5½" wall or chase

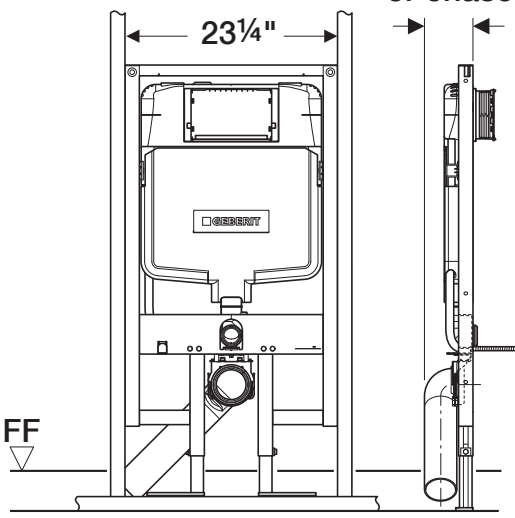


23¼"


FF

i RH, LH or vertical drainage runs allowed with 5½" minimum wall thickness.
Vertical drainage run only for 3½" maximum walls.


1

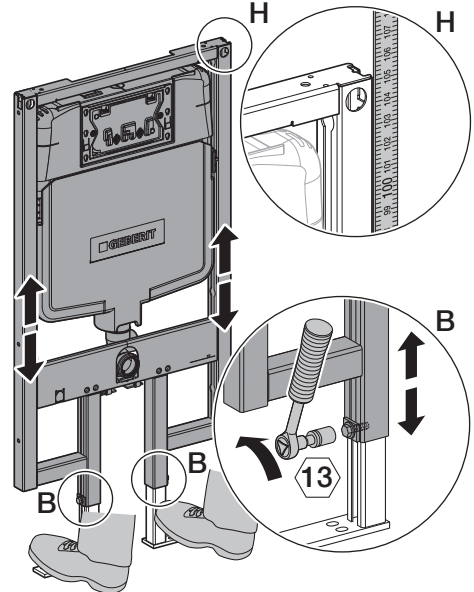



2


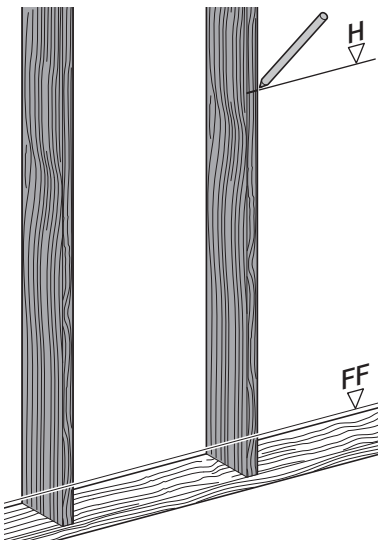


3

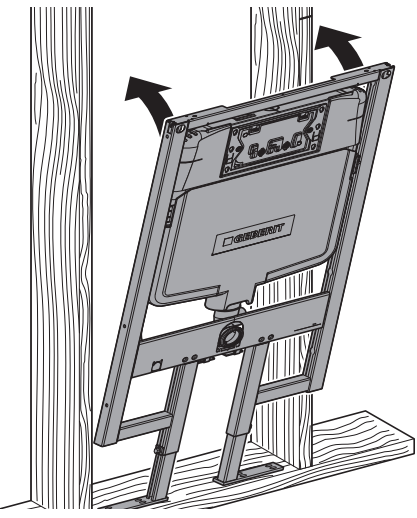

D43300-002 © 07-2010

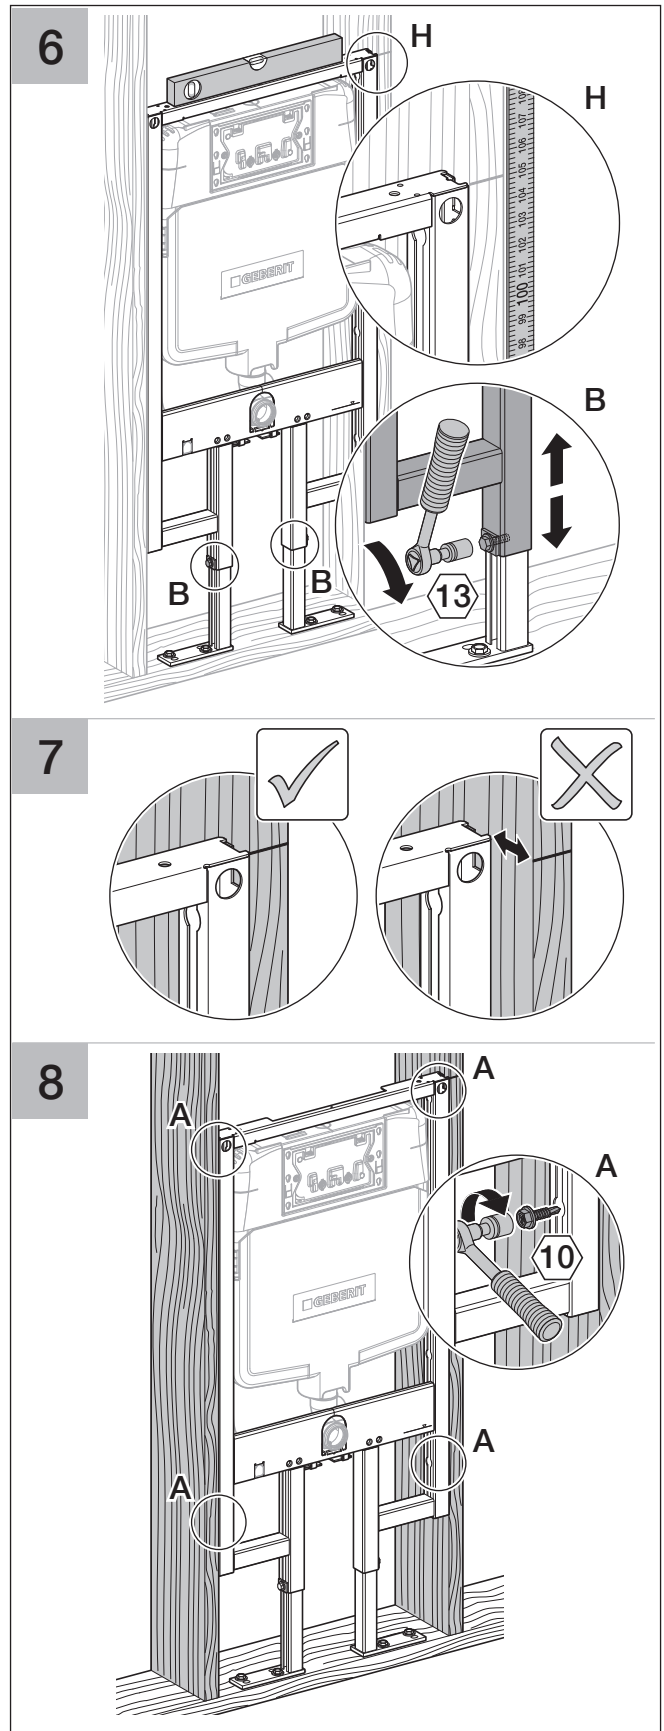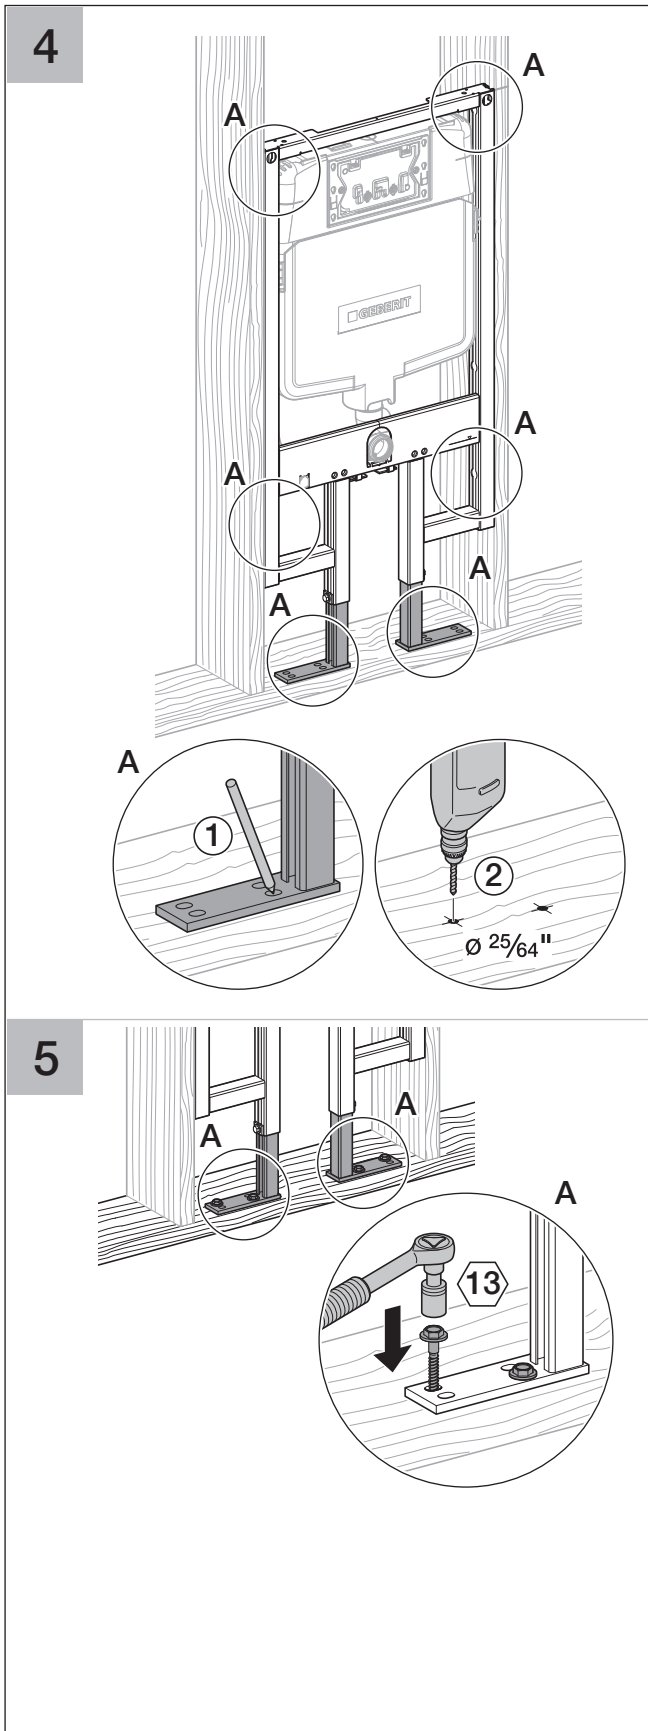

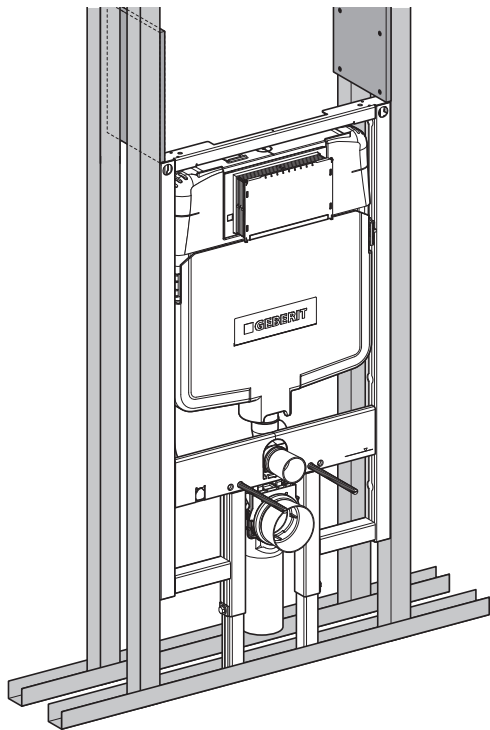
min. 5½" wall or chase

23¼"


FF

i RH, LH or vertical drainage runs allowed with 5½" minimum wall thickness.
Vertical drainage run only for 3½" maximum walls.


1

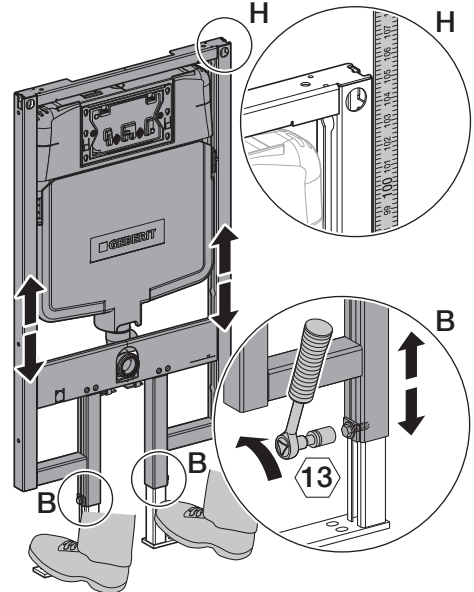

2


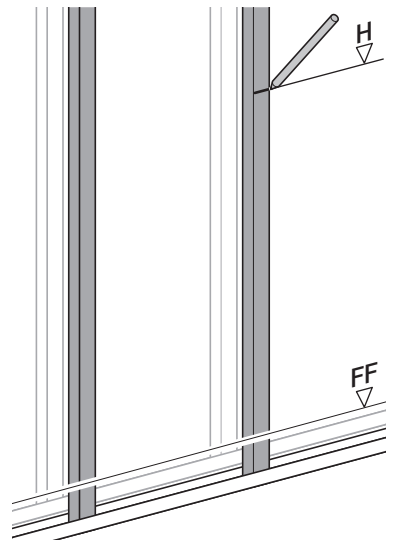


3

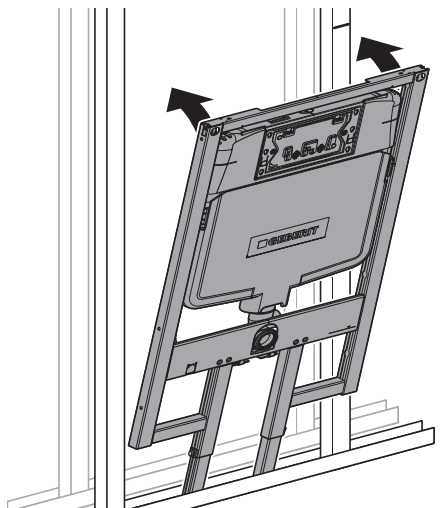

D43300-002 © 07-2010



Installation





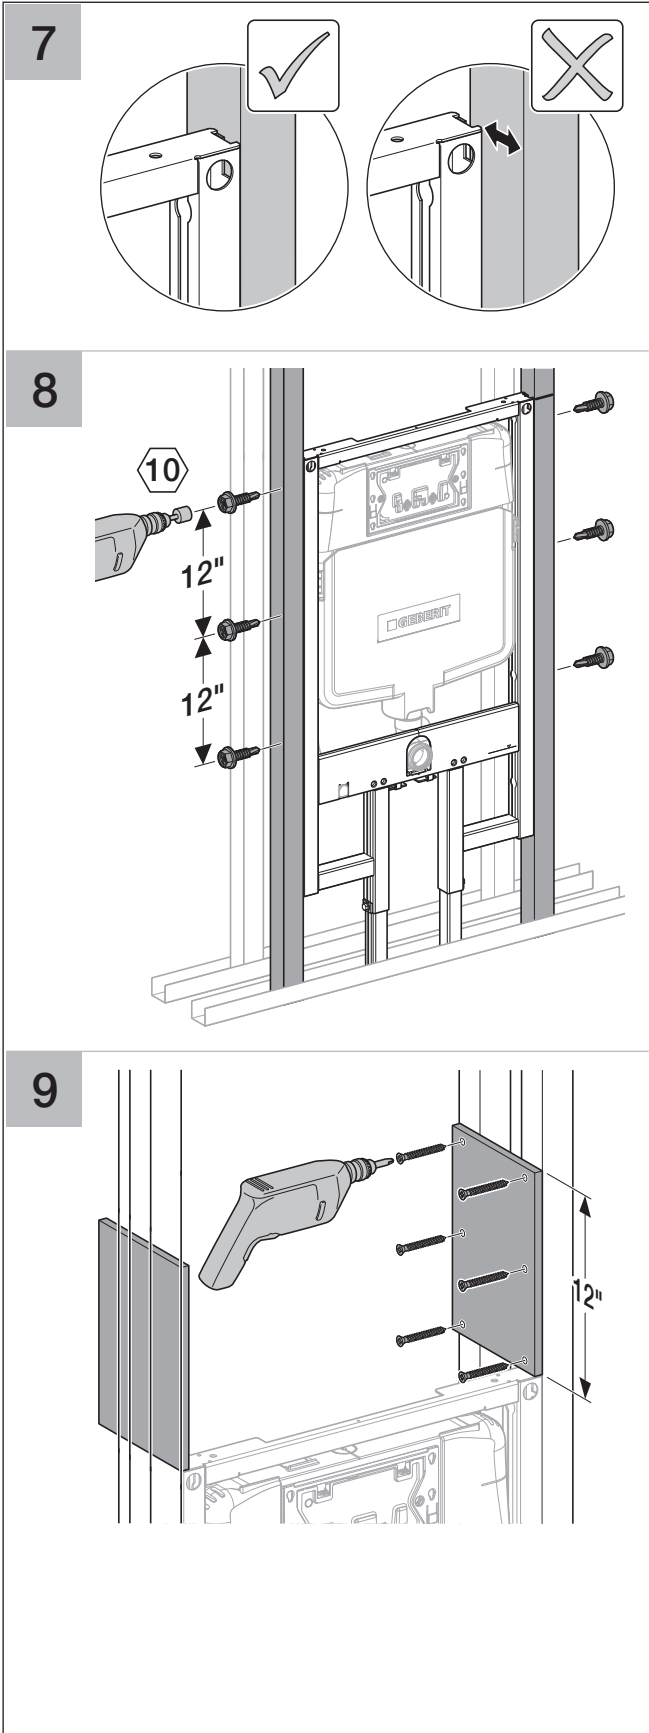
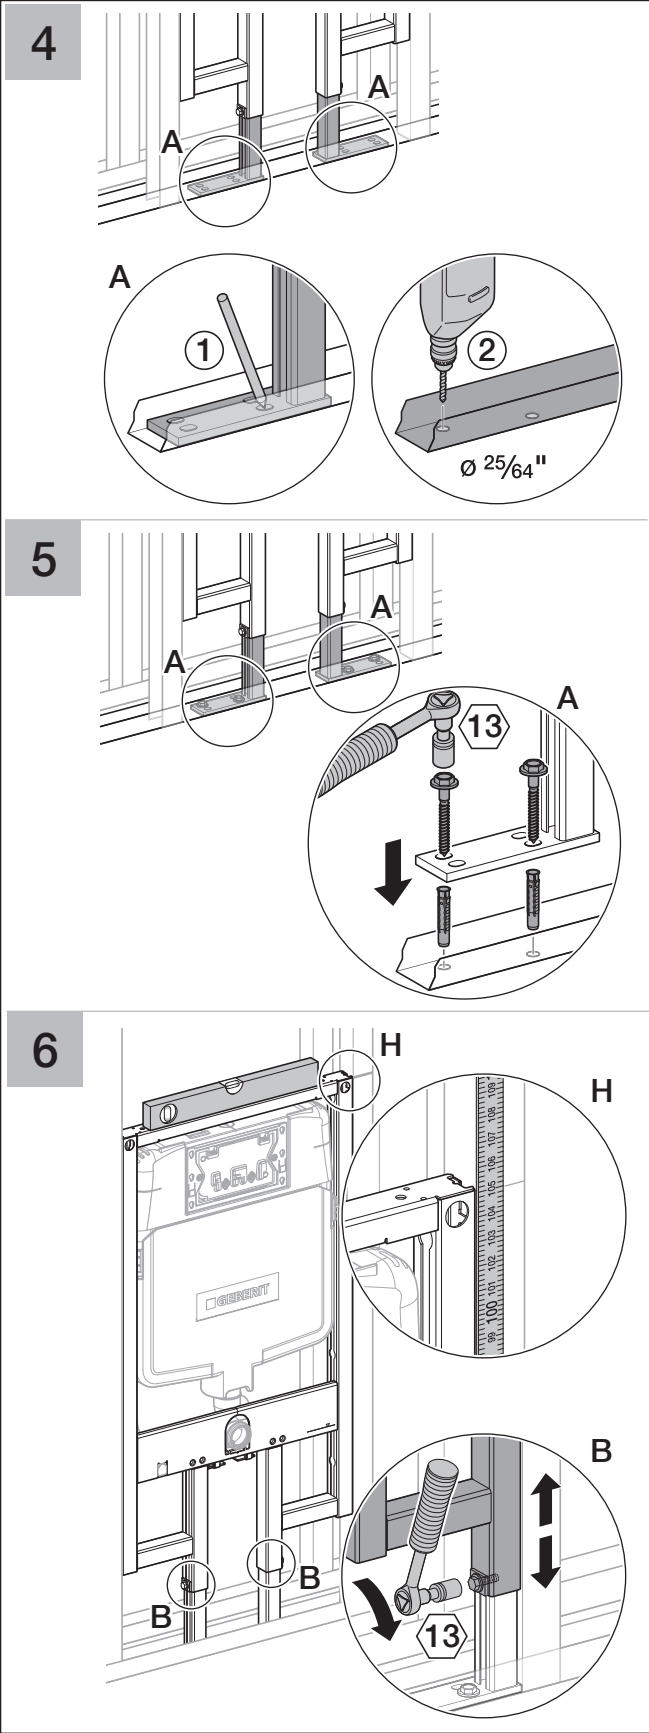


D43300-002 © 07-2010



cUPC®

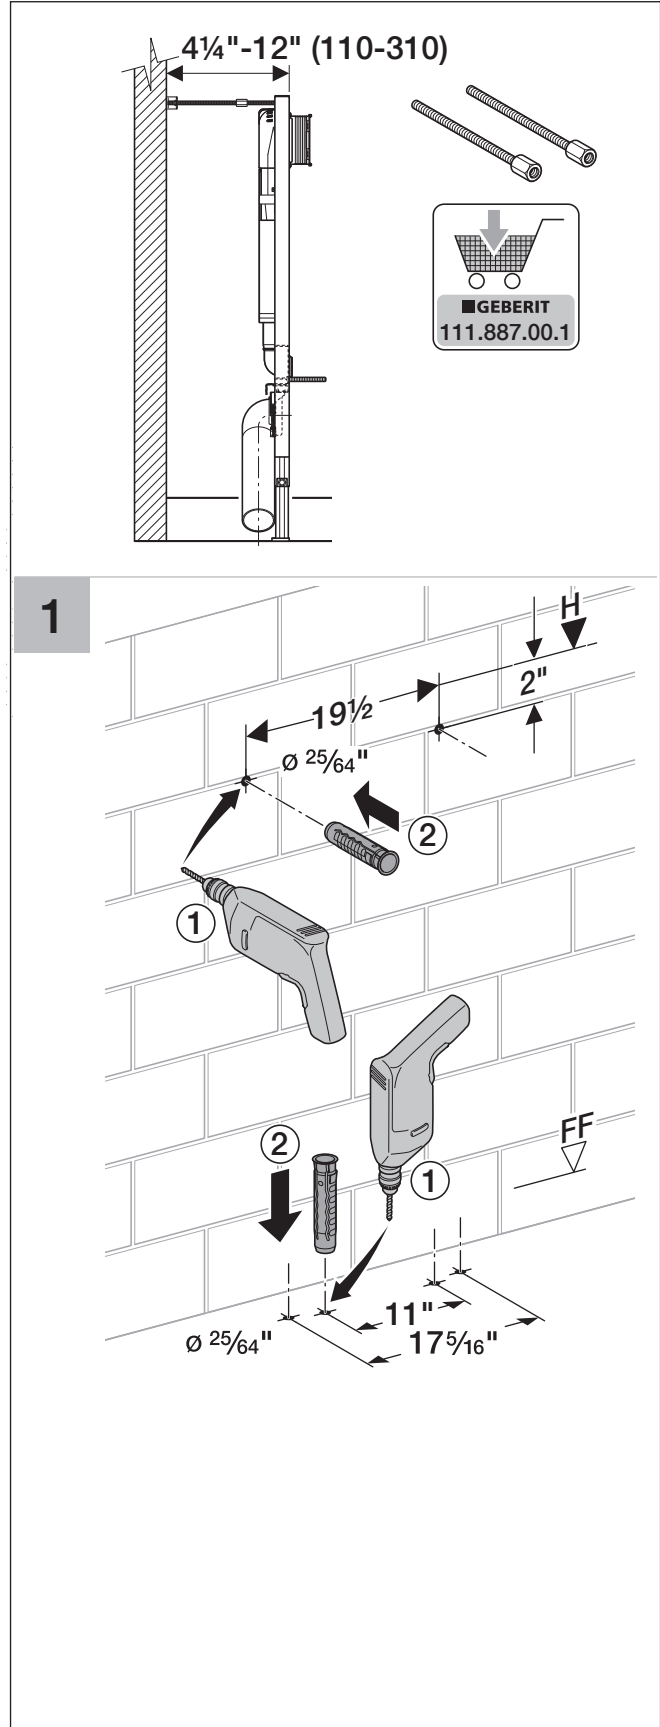
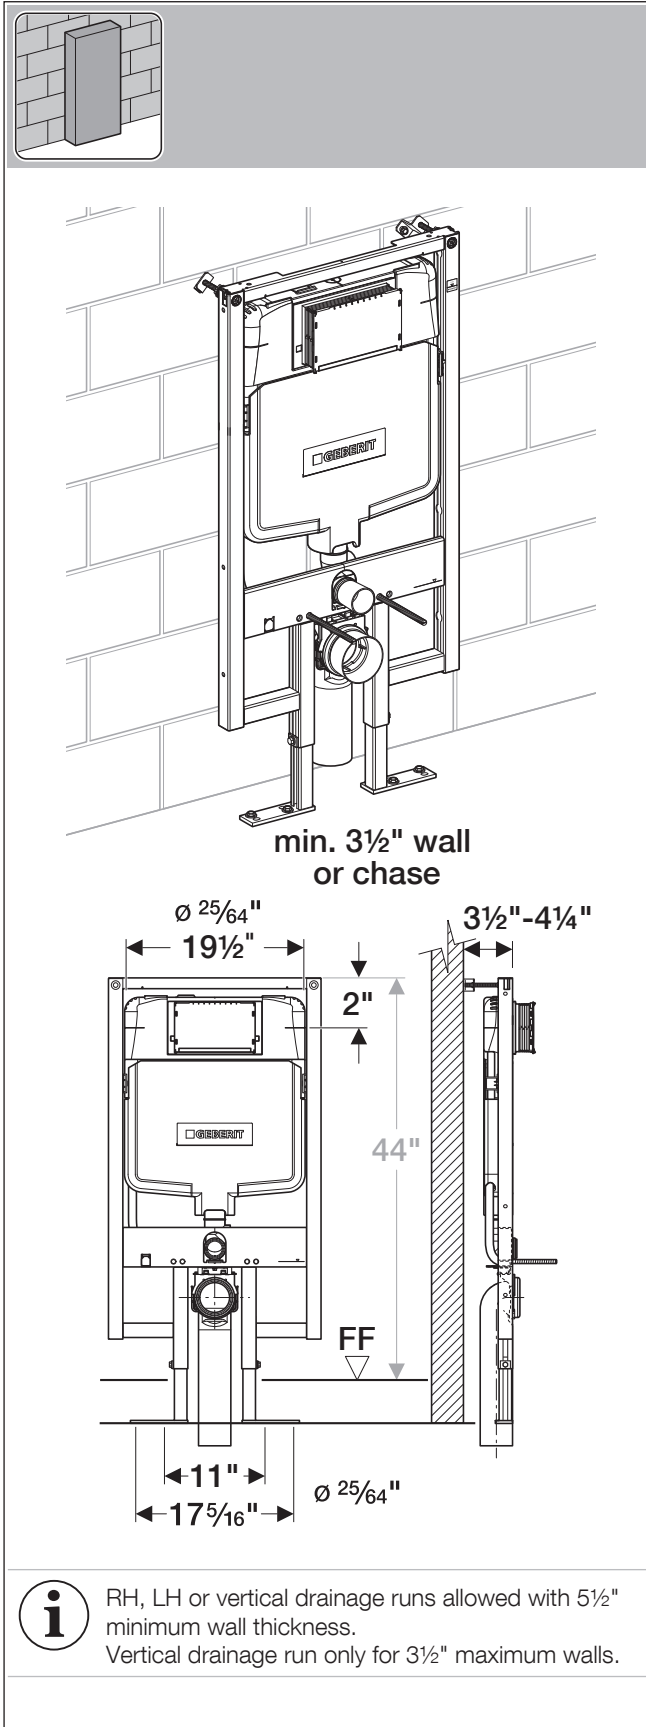


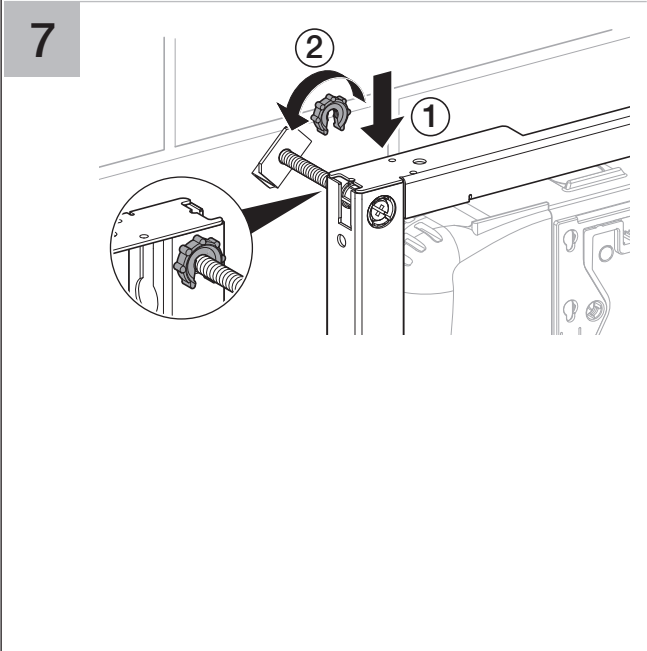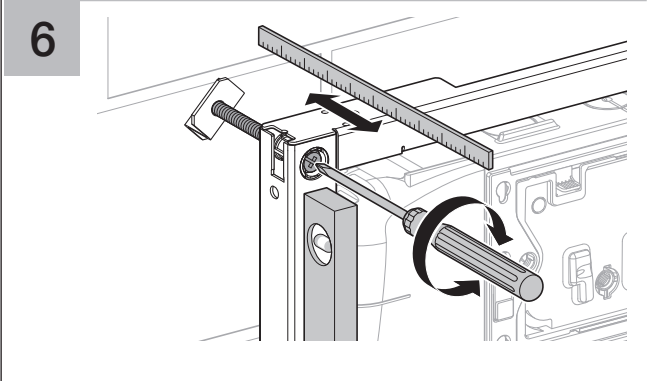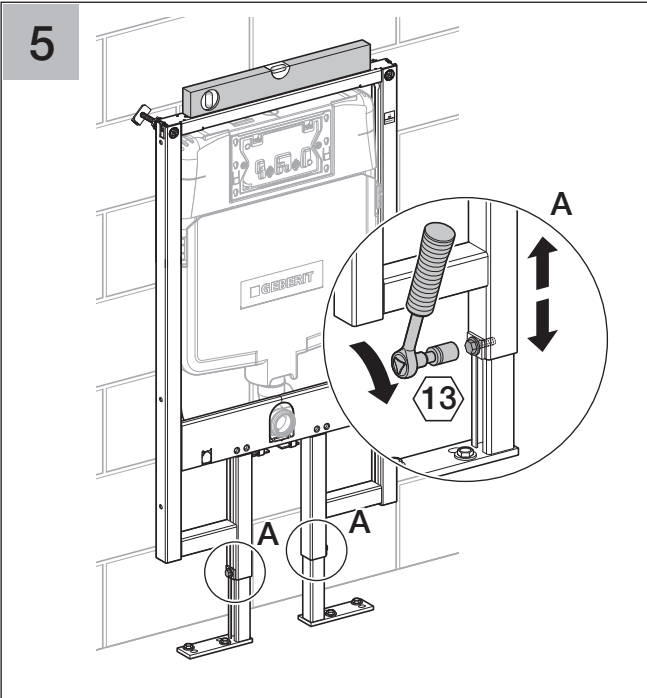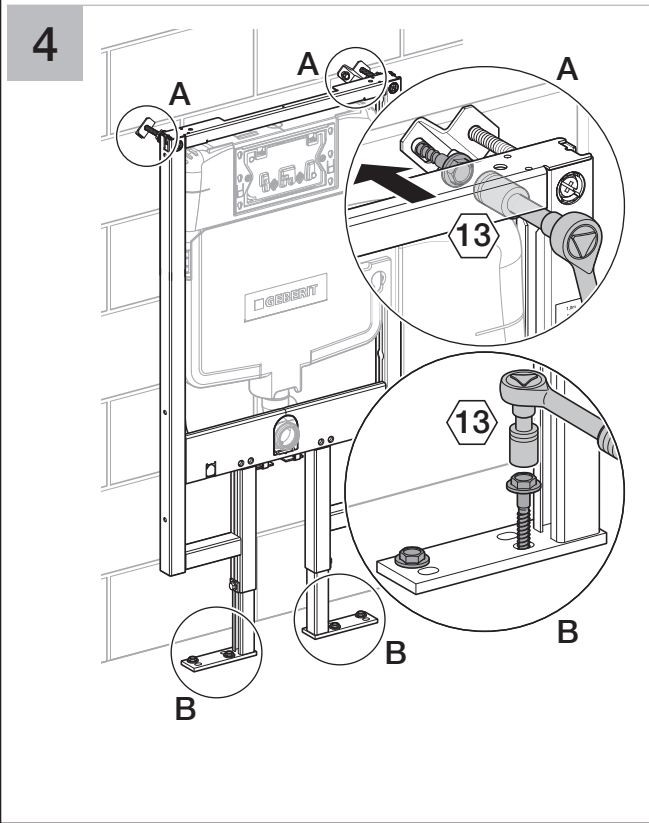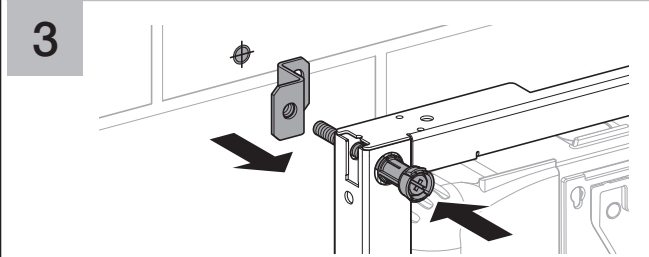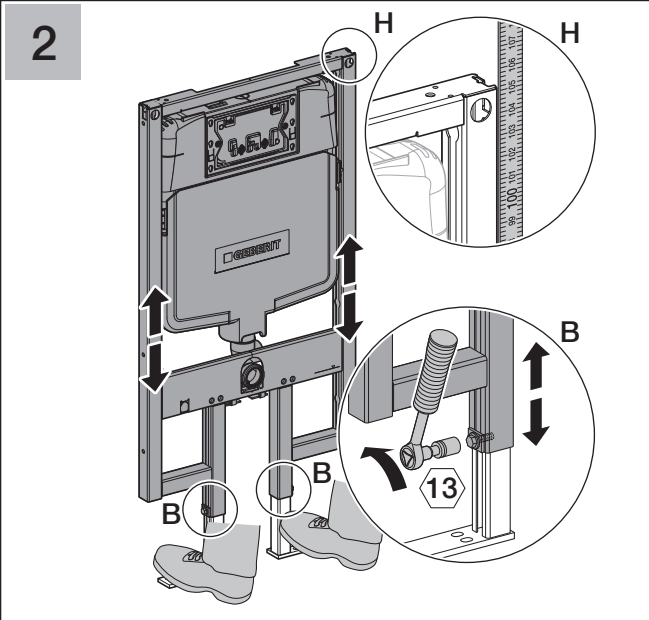







D43300-002 © 07-2010



UPC®

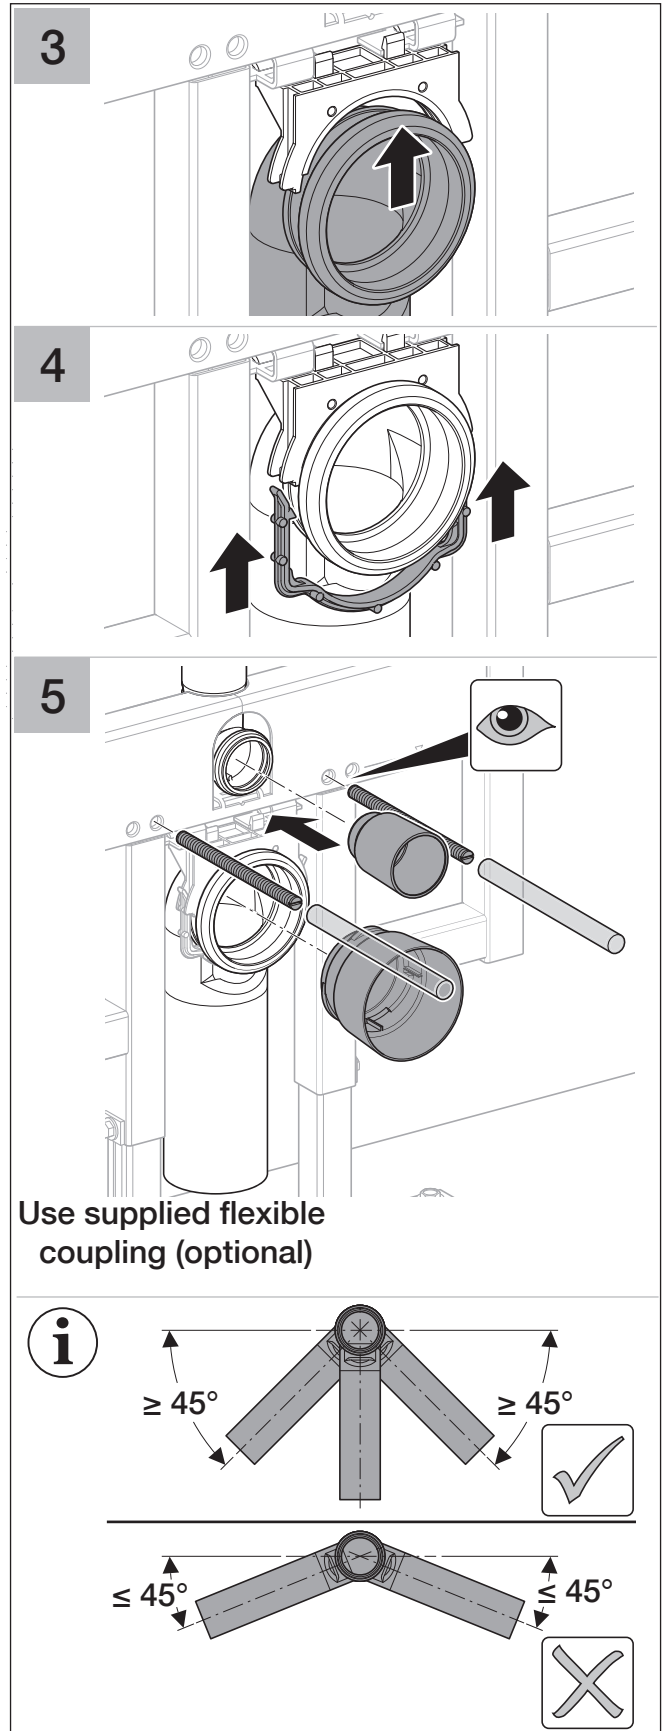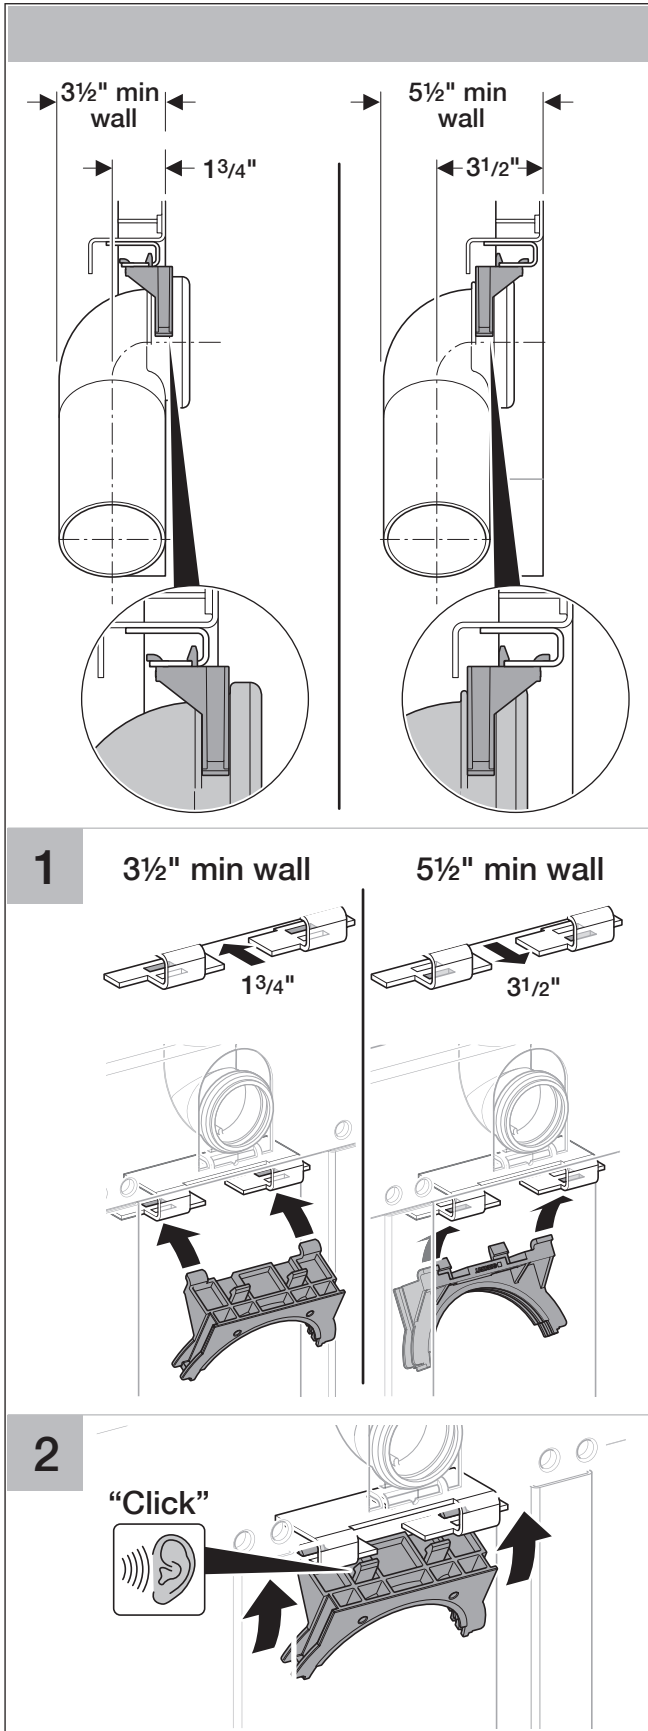






Installation

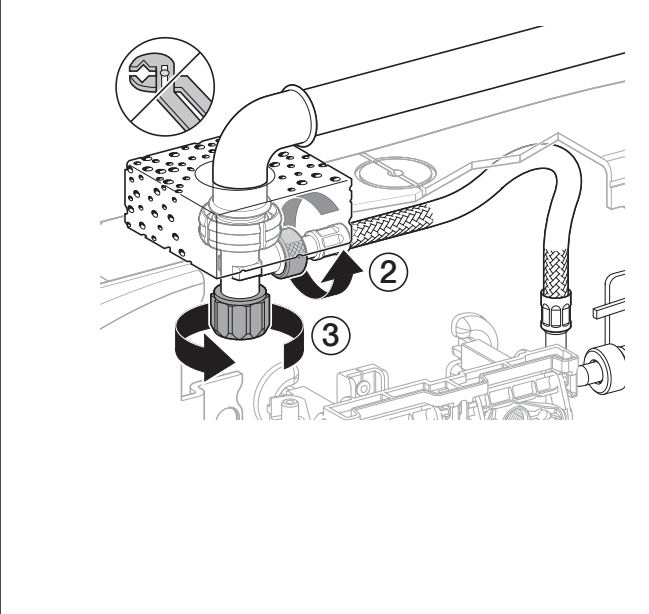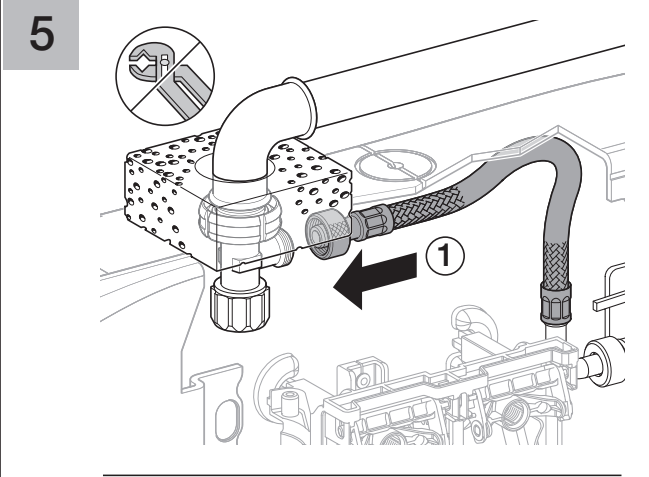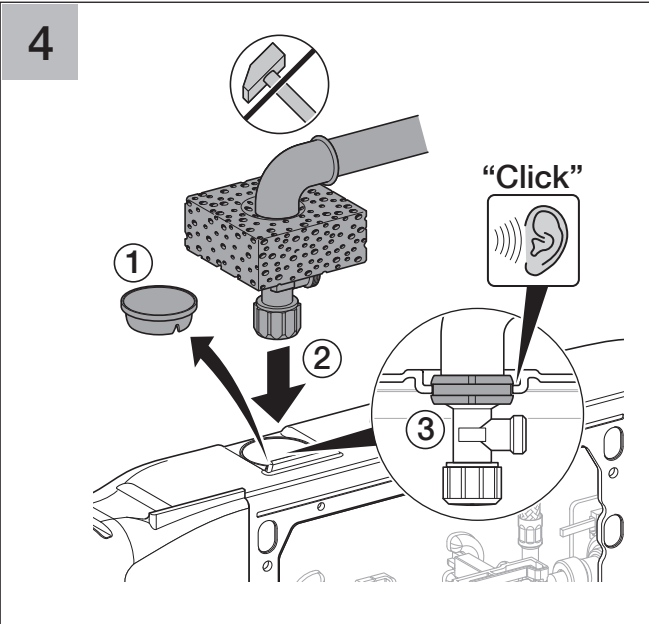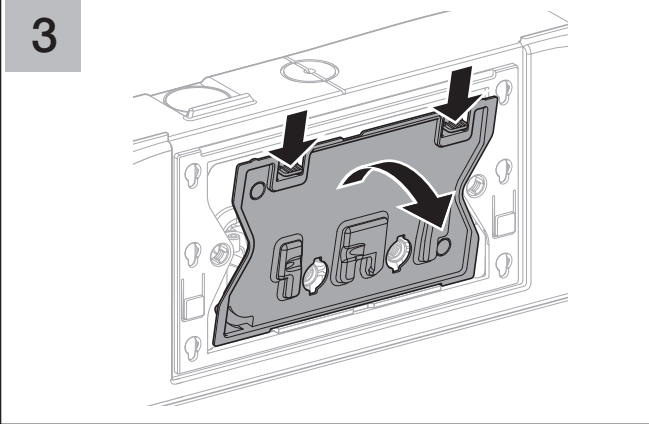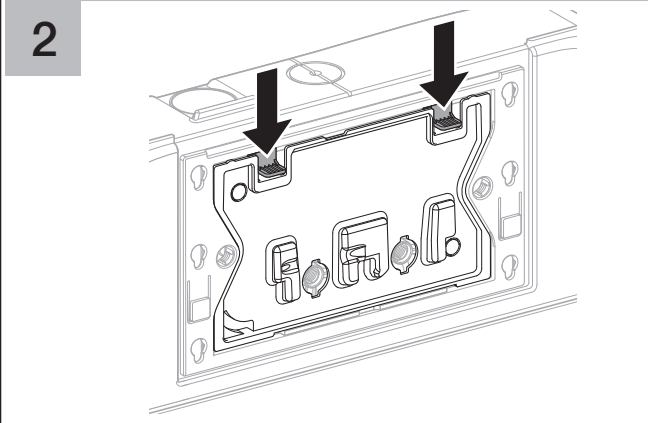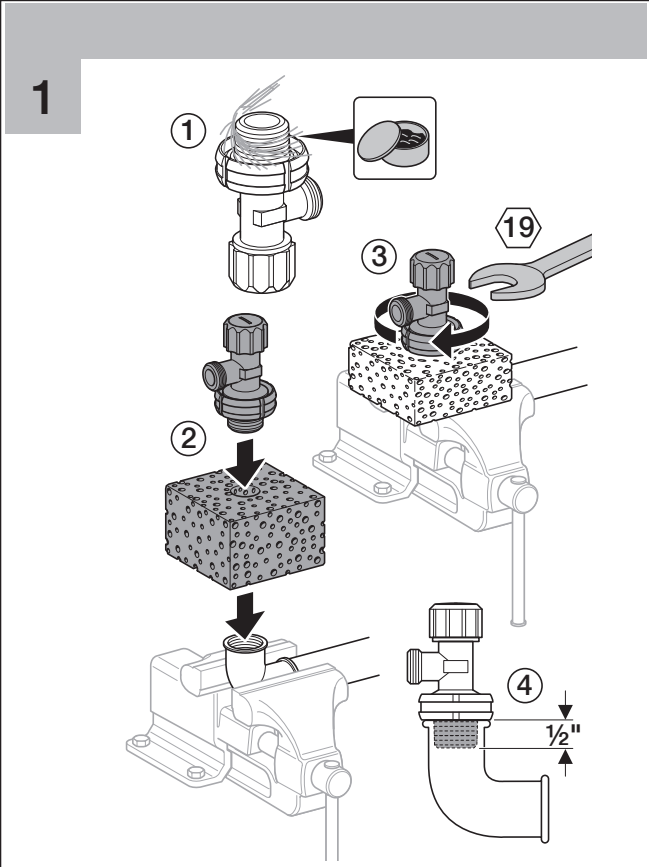

D43300-002 © 07-2010



cUPC®

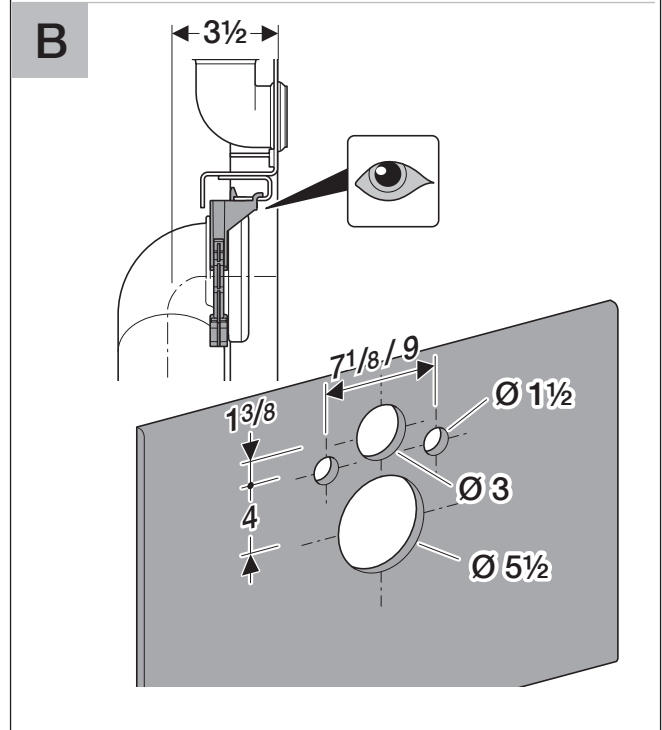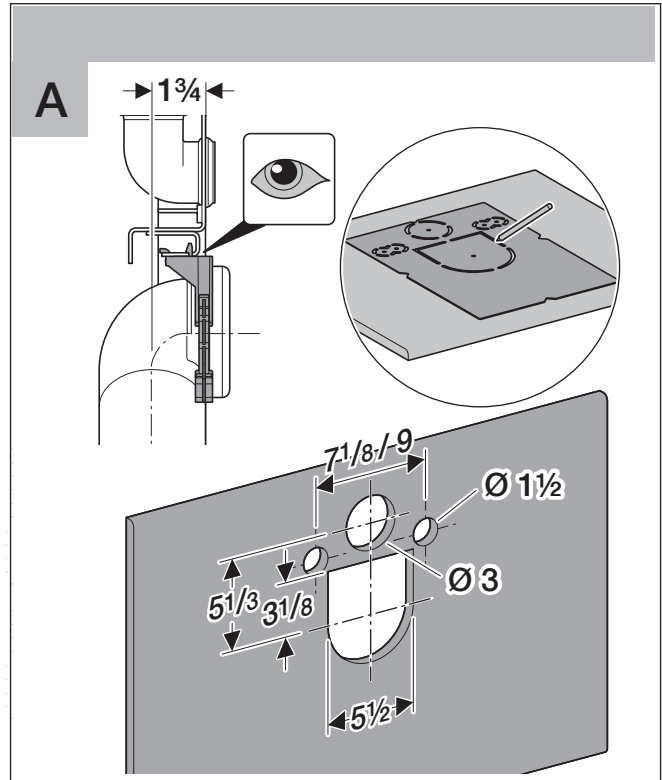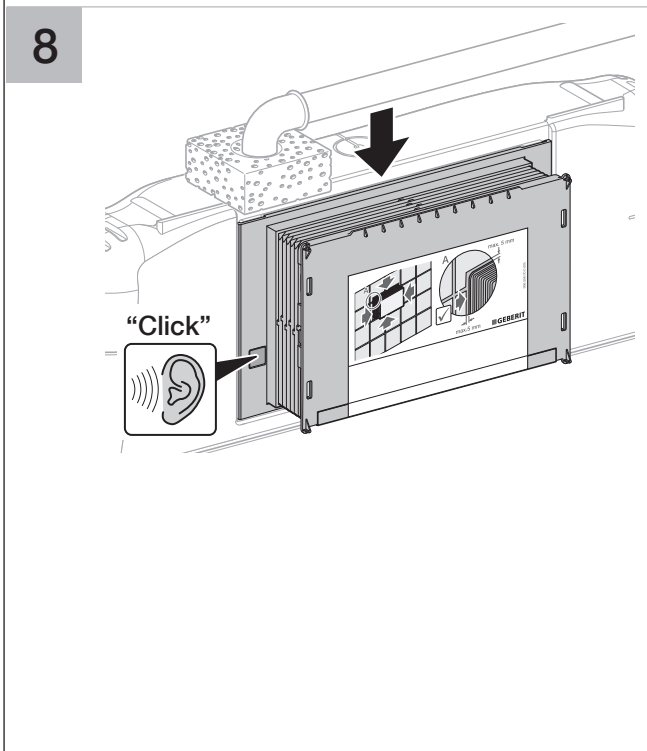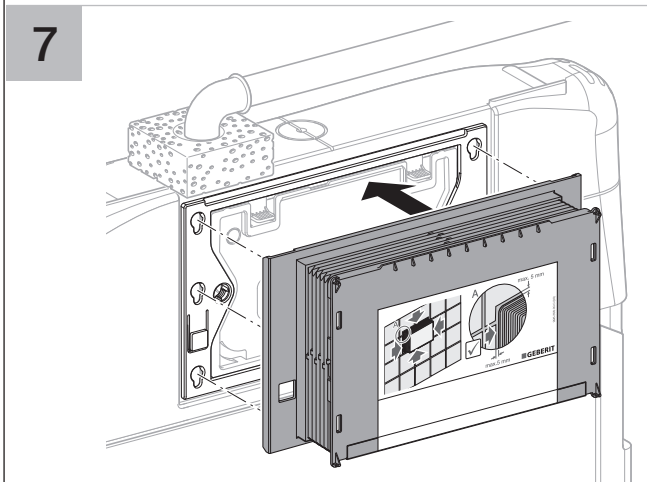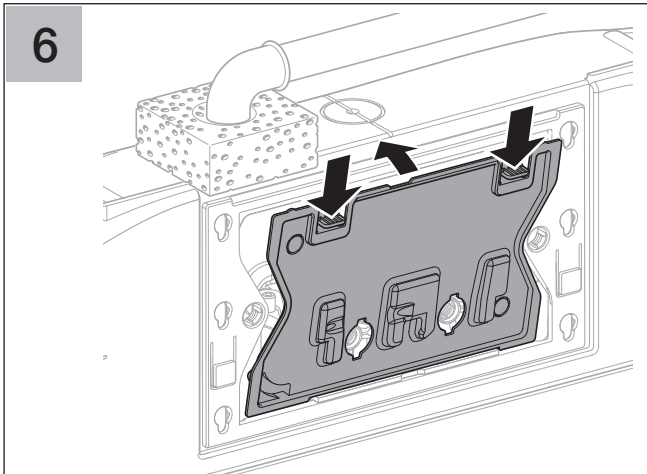

Contact

Geberit
 2100 Clearwater Drive, Des Plaines, IL 60018-5999
www.geberit.us
 Phone: (847) 803 5000 • Fax: 847/803-5454
 For Technical Assistance 800 / TEC-TRUE (800-832-8783)

D43300-002 © 07-2010

